



FLC-36 shown with optional hose

#### HEATING OPTIONS

- Stainless steel steam heated coils
- Steam injector
- Electric immersion heaters
- Gas burner - natural or propane

#### WASH CHAMBER SECTION

- 74" wide x 30" deep x 27" high
- Holds up to 36 sheet pans
- Holds 140 quart mixing bowls
- Rotating spray arms with stainless steel nozzles located above and below wash tray
- Stationary rinse nozzles located above and below wash tray
- Removable pump cover for ease of maintenance
- Rinse water used to freshen wash medium

#### WASH PUMP

- 15 HP totally enclosed, fan cooled motor, horizontally mounted pump
- 240 G.P.M. at 55 PSI
- Stainless steel wash and rinse pipes
- The wash spray arms are provided with easily removable nozzles and end caps for maintenance and cleaning
- Rotating spray arm assemblies located above and below wash area

## MODEL FLC-36

### Front Load Operation - Giant Capacity

The Alvey Model FLC-36 washer for front-loading convenience and the capacity to accommodate standard delivery carts. This efficient stainless steel model also is ideal as a high-volume pot, pan and utensil washer. Completely automatic cycles consists of a recirculated hot water-detergent spray wash followed by a fresh-water sanitizing rinse. *Options listed on back.*

- 208V    230V    460V    60cy 3ph



#### This machine is used to clean:

Pots, trays, bowls, pans, large bowls and delivery carts.

#### Common places this machine is used:

Bakeries, institutions, correctional facilities, animal shelters.

#### TANK AND HOUSING

- Constructed of all welded 14 gauge type 304 stainless steel with polished finish
- 50 gallon capacity
- Stainless steel filter screens

#### DOOR

- Vertical opening stainless steel
- Counter weighted for easy operation
- Door operated safety switch

#### CONTROL PANEL

- UL listed stainless steel panel
- Programmable cycles for light, medium and heavy soil conditions
- Automatic water fill
- Electronic temperature control
- Digital temperature gauges

#### FEATURES

- NSF Certified
- Large wash chamber accommodates standard delivery carts
- Rinse line strainer
- Stainless Steel Filter Screen
- Adjustable sanitary feet
- Shipped to user fully assembled

Shipping Wt. 1250 Lbs.

## Accessories & Optional Equipment for Model FLC-36

### Booster Options for Rinse Water

#### Steam Heated Rinse Water Booster

System will elevate rinse water temperature up to 180°. This unit comes equipped with Gate Valve, Steam Strainer, and Steam Trap. (approx. weight of 200lbs.)

#### Electric Heated Rinse Water Booster

System will elevate temperature of incoming rinse water to 180°. This unit is equipped with low-water cutoff, temperature pressure relief valve, pressure reducing valve and temperature-pressure gauge (approx. 200lbs.)

#### Gas Heated Rinse Water Booster

System will elevate temperature of incoming rinse water to 180°. This unit is equipped with : temperature pressure relief valve, pressure reducing valve and temperature-pressure gauge (approx. 200lbs.)

#### Booster Mounting Options

- Top
- Floor

### Optional Equipment for Model FLC-36

- Insulated Housing
- Draft Inducer (Gas only)
- Work Tray
- Wash Hose & Nozzle
- Pressure Regulator (Water)
- Pressure Regulator (Steam)
- Correctional Facility Application
- High-capacity Ventilation Fan
- Automatic hold-down

### Racks & Baskets for Model FLC-36


- RO1078 - 12 Pocket Bun Pan Rack
- RO1035 - Steam Table Insert Rack
- R01042 - Cake & Pie Pan Rack
- B18311 - Utensil Basket with Lid
- B18320 - Miscellaneous Pan Basket with Lid
- WT0001 - Work Tray (hold 3)
- Custom Racks Available



B18311



RO1035

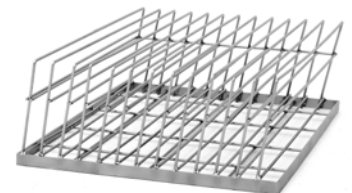

RO1078